


IP CCTV Cameras

FlexCam ANPR Series

Key Features

- 2MP (1920 x 1080) IP Camera
- IP67
- H.265/H.264 compression
- AI deep learning ANPR algorithm
- Capacity for 10,000 number plates
- Support Wiegand
- MicroSD card support up to 256GB
- Applications: Vehicle access to factories, office buildings and residential properties

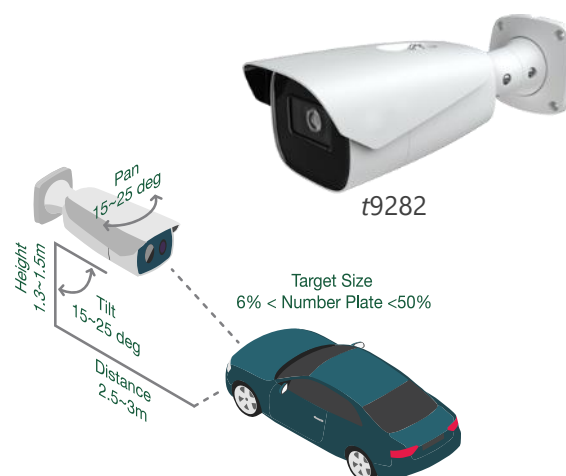

Technical Specifications

Specifications*	t9282
Description	FlexCam ANPR 2MP Bullet IP Camera
Image Sensor	1/2.8" CMOS Sensor
Image Settings	ROI / Saturation / Brightness / Hue / Contrast / Wide Dynamic / Image Flip / Image Mirror / Sharpness / NR
Resolution	2MP
Effective Pixels	1920 (H) x 1080 (V)
Electronic Shutter Speed	1/3sec - 1/100,000sec
Minimum Illumination	0Lux (IR = On), 0.005 lux @F1.6
Recording Mode	NVR / NAS / CMS / Web / Edge
Wide Dynamic Range	120dB
VCA	Automatic Number Plate Recognition (ANPR), Scene Change, Video Blur/Abnormal Color Detection
ANPR Snapshot	Overview and cut out of plate number
Number Plate Database	10,000
ANPR Speed Range	0~50km/h
Lens	2.8-12mm Motorized Zoom Lens
IR Range	50m to 70m
Video Compression	H.265+ / H.265 / H.264+ / H.264 / MJPEG
Video Output	CVBS (BNC)
Audio Input/Output	Audio Input, Audio Output
Serial Output	Wiegand
Storage	Built-in micro SD card slot, up to 256GB
Frame Rate	Main Stream : 1080P / 720P (60Hz: 1~30fps, 50Hz: 1~25fps) 2nd Stream : 720P / D1 / 480x240 / CIF (60Hz: 1~30fps, 50Hz: 1~25fps) 3rd Stream : D1 / 480x240 / CIF (60Hz: 1~30fps, 50Hz: 1~25fps)
Protocol	Wiegand,UDP,IPv4,IPv6,DHCP,NTP,RTSP,RTP,RTCP,RTMP,PPPoE,DDNS,SMTP,FTP,SNMP,802.1x,UPnP,HTTP,HTTPs,HTTP POST,QoS
Interoperability	ONVIF
Power	DC12V / PoE (IEEE 802.3af), <11W
Weight	1.04kg
Dimensions	278.3mm(L) x 100.2mm(W) x 88.7mm(H)
Operating Conditions	-30°C ~ +60°C, Humidity 95% RH max.

*Specifications are subject to change without prior notice

Ordering Information

Model No.	Description
t9282	FlexCam ANPR 2MP Bullet IP Camera